SGS

Certificate FI20/967675

Cangnan County Jiawei Bag Making Factory

No.39-40, Xiangdong Village, Qian Ku Town, Cangnan County, Wenzhou City, Zhejiang Province, China

It is certified that the manufacturer's technical file and the PPE product detailed on page 2 have been assessed and found to be in accordance with


Regulation (EU) 2016/425

Module B, EU type-examination

This certificate is valid from 15 December 2020 until 15 December 2025

1. Certified since 15 December 2020

Authorised by



FINAS
Finnish Accreditation Service
S003 (EN ISO/IEC 17065)

SGS FIMKO OY, Notified Body 0598

Takomotie 8, Fl-00380, Helsinki, Finland t +358 9 696 361 f +358 9 692 5474 www.sgs.com

Page 1 of 2



This document is issued by the Company subject to its General Conditions of Certification Services accessible at www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues established therein. The authenticity of this document may be verified at http://www.sgs.com/en/certified-clients-and-products/certified-client-directory, any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulls as well as the second of the seco



Certificate FI20/967675, continued

Cangnan County Jiawei Bag Making Factory

Regulation (EU) 2016/425

Module B, EU type-examination

Issue 1

PPE Product

JW (logo) CNJW-2020 particle filtering half mask, consisting of a white five layer (polypropylene/ polypropylene/ polypropylene / polypropylene) disposable face mask, with nose clip and nylon/ spandex ear loop.

It is certified that the manufacturer's technical file and the above mentioned PPE have been assessed and found to meet the applicable Essential Health and Safety Requirements in Annex II of Regulation (EU) 2016/425 Personal Protective Equipment

The following have been applied:

EN 149:2001+A1:2009 (Respiratory protective devices - filtering half masks to protect against particles) device classification: FFP2 NR.

This certificate is issued on the strict condition that appropriate checks on manufactured PPE, as detailed in Article 19 (c) of the Regulation are implemented and maintained while the model is in production

Certification is based on technical file reference: Face mask / CNJW-2020, version1, dated: 2020-10-20.

SGS Reference Number UK/CRS 242444.

This certificate remains the property of SGS Fimko Oy to whom it must be returned on request



Cangnan County Jiawei Bag Making Factory

No.39-40, Xiangdong Village, Qian Ku Town, Cangnan County, Wenzhou City, Zhejiang Province, China

It is certified that the manufacturer's technical file and the PPE product detailed on page 2 have been assessed and found to be in accordance with

Regulation (EU) 2016/425

Module B, EU type-examination

This certificate is valid from 15 December 2020 until 15 December 2025

1. Certified since 15 December 2020

Authorised by

Finnish Accreditation Service S003 (EN ISO/IEC 17065)

SGS FIMKO OY, Notified Body 0598

Takomotie 8, Fl-00380, Helsinki, Finland t+358 9 696 361 f+358 9 692 5474 www.sgs.com

Page 1 of 2

Cangnan County Jiawei Bag Making Factory

Regulation (EU) 2016/425

Module B, EU type-examination

Issue 1

PPE Product

JW (logo) CNJW-2020 particle filtering half mask, consisting of a white five layer (polypropylene/ polypropylene/ polypropylene / polypropylene) disposable face mask, with nose clip and nylon/ spandex ear loop.

It is certified that the manufacturer's technical file and the above mentioned PPE have been assessed and found to meet the applicable Essential Health and Safety Requirements in Annex II of Regulation (EU) 2016/425 Personal Protective Equipment

The following have been applied:

EN 149:2001+A1:2009 (Respiratory protective devices - filtering half masks to protect against particles) device classification: FFP2 NR.

This certificate is issued on the strict condition that appropriate checks on manufactured PPE, as detailed in Article 19 (c) of the Regulation are implemented and maintained while the model is in production

Certification is based on technical file reference:

Face mask / CNJW-2020, version1, dated: 2020-10-20.

SGS Reference Number UK/CRS 242444.

This certificate remains the property of SGS Fimko Oy to whom it must be returned on request



The management system of

Cangnan County Jiawei Bag Making Factory

No.39-40, Xiangdong Village, Qian Ku Town, Cangnan County, Wenzhou City, Zhejiang Province, China

has been assessed and certified as meeting the requirements of

Regulation (EU) 2016/425

Module C2

For the following activities

Manufacture of JW (logo) CNJW-2020 particle filtering half mask. (Note: All products marked CE0598 must have a valid EU type-examination certificate issued under Module B or a valid EC type-examination certificate issued under Article 10 of Directive 89/686/EEC.)

This certificate is valid from 22 December 2020 and remains valid subject to satisfactory surveillance audits. Issue 1. Certified since 22 December 2020

Authorised by

SGS FIMKO OY, Notified Body 0598

Takomotie 8, FI-00380 Helsinki, Finland t +358 9 696 361 $\,$ f +358 9 692 5474 $\,$ www.sgs.com

Page 1 of 1









中国认可 国际互认 检测 TESTING CNAS L0599

Test Report SL52035297133901TX Date:September 02,2020 Page

Page 1 of 10

CANGNAN COUNTY JIAWEI BAG MAKING FACTORY

NO.39-40, XIANGDONG VILLAGE, QIAN KU TOWN, CANGNAN COUNTY, WENZHOU CITY, ZHEJIANG PROVINCE

THIS REPORT CANCELS AND SUPERSEDES THE TEST REPORT NO.SL52035285157101TX DATE: 2020-08-26 ISSUED BY SGS (Shanghai) UPDATED SAMPLE INFORMATION.

The following sample(s) was/were submitted and identified on behalf of the client as:

Sample Description : (A)Disposable preventive mask

SGS Internal Ref.No. : CP20-040466 Sample Color : (A)WHITE

Item No. : Melt-blown fabric Model No. : CNJW-2020

Manufacturer : CANGNAN COUNTY JIAWEI BAG MAKING FACTORY
Supplier : CANGNAN COUNTY JIAWEI BAG MAKING FACTORY
Other Info. : Batch No.: 20200728, Specifications: CNJW-2020

Material quality double S25g non-woven fabric, 25g melt-blown fabric, 40g hot air cotton

Test Performed : Selected test(s) as requested by applicant

Sample Receiving Date : Aug 06, 2020

Testing Period : Aug 06, 2020 - Aug 26, 2020

Test Result(s) : Unless otherwise stated the results shown in this test report refer only to the

sample(s) tested, for further details, please refer to the following page(s).

Sample No.	Recommendation Level		
(A)	FFP2 NR		

Signed for and on behalf of

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd Testing Center

Sara Guo (Account Executive)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or, email: CN.Doccheck@sgs.com

3rdBuilding,No.889,Yishan Road,Xuhui District Shanghai,China 200233 中国・上海・徐江区宜山路889号3号楼 邮编: 200233

t (86-21) 61402666 t (86-21) 61402666 f (86–21) 64958763 f (86–21) 64958763



SL52035297133901TX

Date:September 02,2020

Page 2 of 10

Test Result

Personal Protective Equipment - Respiratory Protective Devices- Filtering Half Masks to Protect against Particles- Requirements, Testing, Marking

EN 149:2001+A1:2009

Clause 7.4 Packaging

(EN 149:2001+A1:2009 Clause 8.2)

Test Requirement	Results	Comment
Particle filtering half masks shall be offered for sale packaged in such a way that they are protected against mechanical damage and contamination before use.	Comply	Pass

Clause 7.5 Material

(EN 149:2001+A1:2009, Clause 8.2 & 8.3.1 & 8.3.2)

Test Requirement	Results	Comment
Materials used shall be suitable to withstand handling and wear over the period for which the particle filtering half mask is designed to be used.	Comply	
After undergoing the conditioning described in 8.3.1 none of the particle filtering half masks shall have suffered mechanical failure of the facepiece or straps.	Comply	Pass
When conditioned in accordance with 8.3.1 and 8.3.2 the particle filtering half mask shall not collapse.	Comply	
Any material from the filter media released by the air flow through the filter shall not constitute a hazard or nuisance for the wearer.	Comply	

Clause 7.6 Cleaning and Disinfecting

(EN 149:2001+A1:2009, Clause 8.4 & 8.5 & 8.11)

Test Requirement	Results	Comment
If the particle filtering half mask is designed to be re-usable, the materials used shall withstand the cleaning and disinfecting agents and procedures to be specified by the manufacturer. With reference to 7.9.2, after cleaning and disinfecting the re-usable particle filtering half mask shall satisfy the penetration requirement of the relevant class.	Not applicable (Not designed to be re-usable)	N.A.

Clause 7.7 Practical Performance

(EN 149:2001+A1:2009, Clause 8.4)

Test Requirement	Results	Comment
The particle filtering half mask shall undergo practical performance tests under realistic conditions. These general tests serve the purpose of checking the equipment for imperfections that cannot be determined by the tests described elsewhere in this standard.	No imperfections	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

3rdBuilding,No.889,Yishan Road,Xuhui District Shanghai,China 200233 中国・上海・徐汇区宜山路889号3号楼 邮编: 200233

t (86-21) 61402666

t (86-21) 61402666 f (86-21) 64958763 f (86-21) 64958763



SL52035297133901TX

Date:September 02,2020

Page 3 of 10

Clause 7.8 Finish of Parts

(EN 149:2001+A1:2009, Clause 8.2)

Test Requirement	Results	Comment
Parts of the device likely to come into contact with the wearer shall have no	No sharp	Pass
sharp edges or burrs.	edges or burrs	F 455

Clause 7.9.1 Total Inward Leakage

(EN 149:2001+A1:2009, Clause 8.5)

Test Requirement	Results	Comment
The total inward leakage consists of three components: face seal leakage, exhalation value leakage(if exhalation value fitted) and filter penetration. For particle filtering half masks fitted in accordance with the manufacturer's information, at least 46 out of the 50 individual exercise results (i.e. 10 subjects x 5 exercises) for total inward leakage shall be not greater than: 25% for FFP1, 11% for FFP2, 5% for FFP3 and, in addition, at least 8 out of the 10 individual wearer arithmetic means for the total inward leakage shall be not greater than: 22% for FFP1, 8% for FFP2, 2% for FFP3	Detail refer to Appendix 1	Meet FFP1, Meet FFP2

Appendix 1: Summarization of Test Data

Inward Leakage Test Data

inward Leakage Test Data								
Subject	Sample	Condition	Walk(%)	Head	Head	Talk(%)	Walk(%)	Mean(%)
	No.			Side/side(%)	up/down(%)			
Zhou	1	A.R.	6.65	6.19	6.60	5.87	5.15	6.09
Luo	2	A.R.	7.48	5.51	7.86	7.31	7.35	7.18
Lu	3	A.R.	5.12	4.78	7.51	6.19	7.09	6.14
Wang	4	A.R.	5.35	4.47	6.78	4.35	5.02	5.19
Bao	5	A.R.	7.91	7.42	7.40	6.96	6.36	7.21
Ding	6	T.C.	5.00	5.89	5.24	5.55	5.66	5.47
Li	7	T.C.	6.19	8.23	7.14	8.33	7.79	7.54
Chen	8	T.C.	7.40	4.43	6.20	4.95	5.27	5.65
Song	9	T.C.	7.16	5.84	6.89	7.13	6.25	6.65
Ye	10	T.C.	7.42	8.18	6.61	8.87	6.77	7.57

Facial Dimension(mm)

Subject	Face length	Face Width	Face Depth	Mouth Width
Chen	125	150	120	58
Lu	115	132	107	48
Zhou	115	135	106	52
Li	125	130	107	46
Luo	125	136	100	43
Zheng	128	140	112	55
Wang	120	147	103	48
Song	120	140	100	50
Bao	130	134	104	50



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

3rdBuilding,No.889,Yishan Road,Xuhui District Shanghai,China 200233 中国・上海・徐汇区宜山路889号3号楼 邮编: 200233

t (86-21) 61402666

t (86-21) 61402666 f (86-21) 64958763 f (86-21) 64958763



Test Rep	oort SL5203	5297133901TX [Date:September 02,20	20 Page 4 of 10
Ding	134	150	110	52
Liu	120	135	117	50
Ye	126	137	105	52

Clause 7.9.2 Penetration of Filter Material

(EN 149:2001+A1:2009, Clause 8.11 & EN 13274-7:2019)

		Test Requirement		Results	Comment	
		of the filter of the particle filte	he			
requ	urements of t	the following table.				
	Classifica Maximum penetration of test aerosol					
	tion	Sodium chloride test 95	Paraffin oil test 95 l/min			
		l/min			Detail refer to	Meet FFP1,
		%	%		Appendix 2	Meet FFP2
		max.	max.			
	FFP1	20	20			
	FFP2	6	6			
	FFP3	1	1			

Appendix 2: Summarization of Test Data

Penetration of filter material

Aerosol	Condition	Sample No.	Penetration (%)
		1	0.526
	As received	2	0.434
		3	0.472
		4	0.503
Sodium chloride test	Simulated wearing treatment	5	0.468
	_	6	0.452
	Machania I study ath Tanana astrona	7	1.234
	Mechanical strength +Temperature conditioned	8	1.346
	conditioned	9	1.174
		10	0.512
	As received	11	0.557
		12	0.607
		13	0.532
Paraffin oil test	Simulated wearing treatment	14	0.587
	_	15	0.519
	Machaniaal atropath . Tampayatura	16	2.374
	Mechanical strength +Temperature conditioned	17	2.264
	Conditioned	18	2.472
	Flow conditioning: Single fil	ter: 95.0 L/min	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

3rdBuilding,No.889,Yishan Road,Xuhui District Shanghai,China 200233 中国・上海・徐汇区宜山路889号3号楼 邮编: 200233 t (86-21) 61402666 f (86-21) 64958763 t (86-21) 61402666

f (86-21) 64958763



SL52035297133901TX Test Report Clause 7.10 Compatibility with Skin

(EN 149:2001+A1:2009, Clause 8.4 & 8.5)

Date:September 02,2020

Page 5 of 10

Test Requirement	Results	Comment
erials that may come into contact with the wearer's skin shall not be wn to be likely to cause irritation or any other adverse effect to health.	No irritation or any other adverse effect to health	Pass

Clause 7.11 Flammability

(EN 149:2001+A1:2009, Clause 8.6)

Test Requirement	Results	Comment
The material used shall not present a danger for the wearer and shall not be of highly flammable nature	Detail refer to	Door
When tested, the particle filtering half mask shall not burn or not to continue to burn for more than 5 s after removal from the flame.	Appendix 3	Pass

Appendix 3: Summarization of Test Data

Flammability

<u> Hammaoiity</u>	tariin abiirty							
Condition	Sample No.	Result						
	1	NIL						
As received	2	NIL						
Temperature conditioned	3	NIL						
	4	NIL						

Clause 7.12 Carbon Dioxide Content of The Inhalation Air

(EN 149:2001+A1:2009, Clause 8.7)

Test Requirement	Results	Comment
The carbon dioxide content of the inhalation air (dead space) shall not exceed an average of 1,0 % (by volume)	Detail refer to Appendix 4	Pass

Appendix 4: Summarization of Test Data

Carbon Dioxide Content of The Inhalation Air

Condition	Sample No.	Resul	Result(%)			
		0.4640				
	1					
As resolved		0.4637	Moon value 0.46			
As received	2		Mean value:0.46			
		0.4625				
	3					



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

3rdBuilding,No.889,Yishan Road,Xuhui District Shanghai,China 200233 中国・上海・徐汇区宜山路889号3号楼 邮编: 200233

t (86-21) 61402666

t (86-21) 61402666 f (86-21) 64958763 f (86-21) 64958763



Test Report SL52035297133901TX Clause 7.13 Head Harness

(EN 149:2001+A1:2009, Clause 8.4 & 8.5)

Date:September 02,2020

Page 6 of 10

Test Requirement	Results	Comment
The head harness shall be designed so that the particle filtering half mask can be donned and removed easily.	Comply	
The head harness shall be adjustable or self-adjusting and shall be sufficiently robust to hold the particle filtering half mask firmly in position and be capable of maintaining total inward leakage requirements for the device.	Comply	Pass

Clause 7.14 Field of Vision

(EN 149:2001+A1:2009, Clause 8.4)

Test Requirement	Results	Comment
The field of vision is acceptable if determined so in practical performance tests.	Comply	Pass

Clause 7.15 Exhalation Valve(s)

(EN 149:2001+A1:2009, Clause 8.2 & 8.9.1 & 8.3.4 & 8.8)

Test Requirement	Results	Comment
(a) A particle filtering half mask may have one or more exhalation valve(s), which shall function correctly in all orientations.	Not applicable due to No exhalation valve	
(b) If an exhalation valve is provided it shall be protected against or be resistant to dirt and mechanical damage and may be shrouded or may include any other device that may be necessary for the particle filtering half mask to comply with 7.9.	Not applicable due to No exhalation valve	N.A.
(c) Exhalation valve(s), if fitted, shall continue to operate correctly after a continuous exhalation flow of 300 l/min over a period of 30 s.	Not applicable due to No exhalation valve	
(d) When the exhalation valve housing is attached to the faceblank, it shall withstand axially a tensile force of 10N applied for 10 s.	Not applicable due to No exhalation valve	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

3rdBuilding,No.889,Yishan Road,Xuhui District Shanghai,China 200233 中国・上海・徐汇区宜山路889号3号楼 邮编: 200233

t (86-21) 61402666

t (86-21) 61402666 f (86-21) 64958763 f (86-21) 64958763



SL52035297133901TX

Date:September 02,2020

Page 7 of 10

Clause 7.16 Breathing Resistance

(EN 149:2001+A1:2009, Clause 8.9)

	Tes	Results	Comment			
The penetration requirements of		eet the				
Classification	Maximu	um permitted resista	ance (mbar)		Datailuafauta	Meet FFP1,
	Inf	nalation	Exhalation		Detail refer to	Meet FFP2,
	30 l/min	95 l/min	160 l/min		Appendix 5	Meet FFP3
FFP1	0.6	2.1	3.0			
FFP2	FFP2 0.7 2.4 3.0					
FFP3	1.0	3.0	3.0			

Appendix 5: Summarization of Test Data

Breathing resistance (mbar)

					1					2					3		
As received	Flow rate(l	/min)	Α	В	Ċ	D	Е	Α	В	C	D	Е	Α	В	C	D	Е
	Inhalation	30	0.4	0.5	0.5	0.4	0.5	0.4	0.4	0.5	0.4	0.5	0.5	0.4	0.4	0.5	0.5
	IIIIaiatioii	95	1.5	1.6	1.6	1.5	1.5	1.6	1.6	1.5	1.5	1.6	1.6	1.5	1.6	1.6	1.5
	Exhalation	160	2.7	2.8	2.7	2.7	2.8	2.7	2.7	2.8	2.7	2.8	2.8	2.7	2.7	2.8	2.7
	Ela vala/l	/ ' - \			4					5					6		
Simulated	Flow rate(l	min)	Α	В	O	D	Е	Α	В	O	ם	Е	Α	В	C	D	Е
wearing	Inhalation	30	0.5	0.5	0.4	0.4	0.3	0.4	0.3	0.4	0.5	0.5	0.4	0.5	0.5	0.4	0.5
treatment	IIIIaiation	95	1.6	1.5	1.6	1.6	1.6	1.5	1.6	1.5	1.6	1.6	1.5	1.6	1.5	1.6	1.5
	Exhalation	160	2.7	2.7	2.8	2.8	2.7	2.7	2.8	2.7	2.7	2.8	2.7	2.8	2.8	2.7	2.8
	Ela vala/l	/ ' - \			7				8 9								
	Flow rate(l	min)	Α	В	O	D	Е	Α	В	O	ם	Е	Α	В	C	D	Е
Temperature conditioned	Inhalation	30	0.4	0.5	0.4	0.4	0.4	0.5	0.4	0.4	0.5	0.4	0.4	0.5	0.4	0.5	0.4
	IIIIIaiallOII	95	1.4	1.5	1.5	1.4	1.5	1.5	1.5	1.4	1.5	1.5	1.5	1.4	1.5	1.4	1.5
	Exhalation	160	2.8	2.7	2.7	2.8	2.7	2.7	2.8	2.7	2.7	2.8	2.7	2.7	2.8	2.8	2.7

A: facing directly ahead; B: facing vertically upwards; C: facing vertically downwards; D: lying on the left side; E: lying on the right side



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

3rdBuilding,No.889,Yishan Road,Xuhui District Shanghai,China 200233 中国・上海・徐汇区宜山路889号3号楼 邮编: 200233

t (86-21) 61402666

t (86-21) 61402666 f (86-21) 64958763 f (86-21) 64958763



SL52035297133901TX

Date:September 02,2020

Page 8 of 10

Clause 7.17 Clogging

(EN 149:2001+A1:2009, Clause 8.9 & 8.10)

		Test Requirement	Results	Comment	
Valved p After clc FFP1: 4 The ext flow. Valveles After clc	particle filt ogging the I mbar, FF nalation re ogging the	eathing resistance tering half masks: inhalation resistances shall not FP2: 5 mbar, FFP3: 7 mbar at 95 esistance shall not exceed 3 mb filtering half masks: inhalation and exhalation resis FP2: 4 mbar, FFP3: 5 mbar at 95	Optional for single shift device only	N.A.	
All type meet the	s (valved	netration of filter material and valveless) of particle filter requirement shall also meet the Maximum penetration			
	n	Sodium chloride test 95 l/min % max.	Optional for single shift device only	N.A.	
F	FP1	20	max. 20		
F	FP2	6	6		
F	FP3	1	1		

Clause 7.18 Demountable Parts

(EN 149:2001+A1:2009, Clause 8.2)

Test Requirement	Results	Comment
All demountable parts (if fitted) shall be readily connected and secured, where possible by hand	No demountable parts	N/A

Test	Uncertainty
Total inward leakage	3.4%
Penetration of filter material	4.8%
Carbon dioxide content of the inhalation air	3.9%
Breathing resistance (30L/min)	5.9%
Breathing resistance (95L/min)	4.9%
Breathing resistance (160L/min)	4.3%



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

3rdBuilding,No.889,Yishan Road,Xuhui District Shanghai,China 200233 中国・上海・徐汇区宜山路889号3号楼 邮编: 200233

t (86-21) 61402666

t (86-21) 61402666 f (86-21) 64958763 f (86-21) 64958763




SL52035297133901TX

Date:September 02,2020

Page 9 of 10



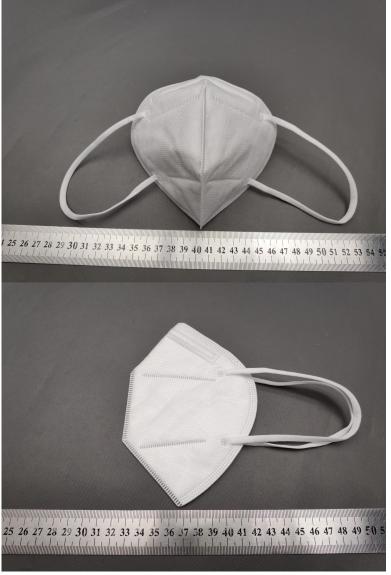



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

3rdBuilding,No.889,Yishan Road,Xuhui District Shanghai,China 200233 中国・上海・徐汇区宜山路889号3号楼 邮编: 200233

t (86-21) 61402666


t (86-21) 61402666 f (86-21) 64958763 www.sgsgroup.com.cn f (86-21) 64958763 e sgs.china@sgs.com



SL52035297133901TX

Date:September 02,2020

Page 10 of 10

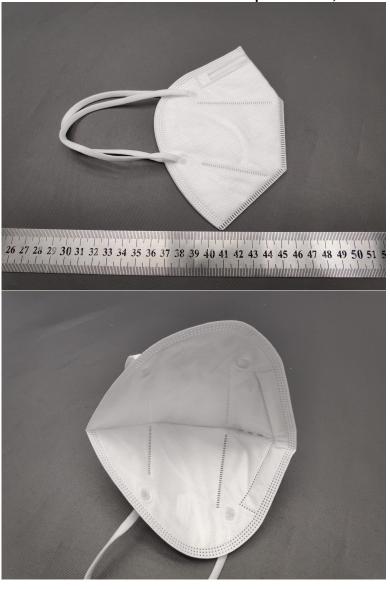

End of Report



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

3rdBuilding,No.889,Yishan Road,Xuhui District Shanghai,China 200233 中国・上海・徐汇区宜山路889号3号楼 邮编: 200233 t (86-21) 61402666 t (86-21) 61402666

f (86–21) 64958763 f (86–21) 64958763